



Qubica Flat & Qubica Flat with AKI LED Technical Information

1200	360	2	

UK
CA CE

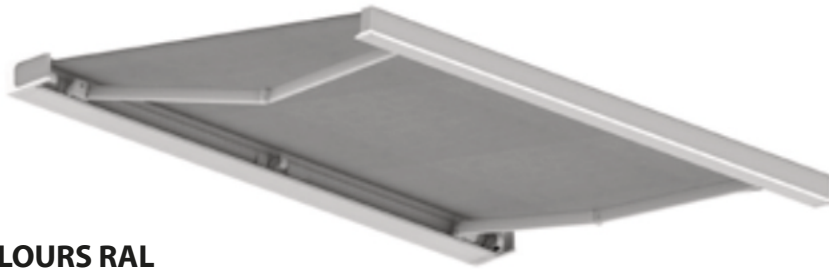

COLOURS RAL

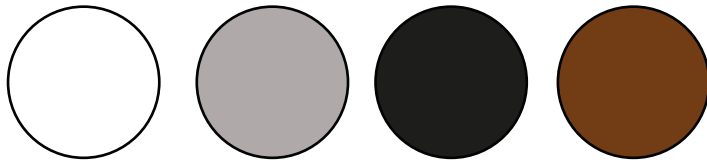

Standard 9010 WHITE 9006 ALUMINIUM CARBON CORTEN

COLOUR COMBINATIONS



	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10BA	C11	C12	C13	C14	C15	C16
	9010	9010	9010	9010	9006	9006	9006	9006	CARBON	CARBON	CARBON	CARBON	CORTEN	CORTEN	CORTEN	CORTEN
	9010	9006	CARBON	CORTEN	9006	9010	CARBON	CORTEN	CARBON	9010	9006	CORTEN	CORTEN	9010	9006	CARBON

Minimum awning encumbrances -
1 pair standard arms
For AKI LED Arms add 20cm to the width


- Arms
- ▼ Kit conveyer
- Arm support -wall or ceiling bracket

cm	
	2 Brackets
160	220
185	245
210	270
235	295
260	320
310	379
360	428

cm																
		400	500	600	700	800	900	1000	1100	1200						
160	■	2	2	2	4	4	4	4	6	6						
	▼	2	3	3	5	5	5	5	7	7						
	-	2	2	2	4	4	4	4	6	6						
185	■	2	2	2	4	4	4	4	6	6						
	▼	2	3	3	5	5	5	5	7	7						
	-	2	2	2	4	4	4	4	6	6						
210	■	2	2	2	4	4	4	4	6	6						
	▼	2	3	3	5	5	5	5	7	7						
	-	2	2	2	4	4	4	4	6	6						
235	■	2	2	2	4	4	4	4	6	6						
	▼	2	3	3	5	5	5	5	7	7						
	-	2	2	2	4	4	4	4	6	6						
260	■	2	2	2	3	4	4	4	6	6						
	▼	2	3	3	4	5	5	5	7	7						
	-	2	2	2	3	4	4	4	6	6						
310	■	2	2	2	3	3	4	4	5	5						
	▼	3	3	3	4	4	5	5	6	6						
	-	2	2	2	3	3	4	4	5	5						
360	■	-	2	2	2	3	3	4	4	5						
	▼	-	3	3	4	4	4	5	5	6						
	-	-	2	2	2	3	3	4	4	5						

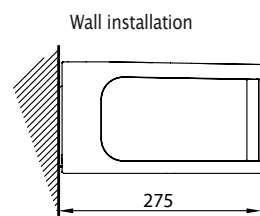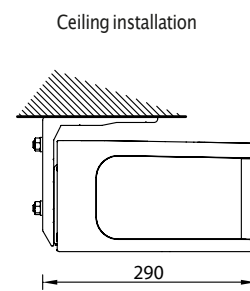

Ceiling covering diagram

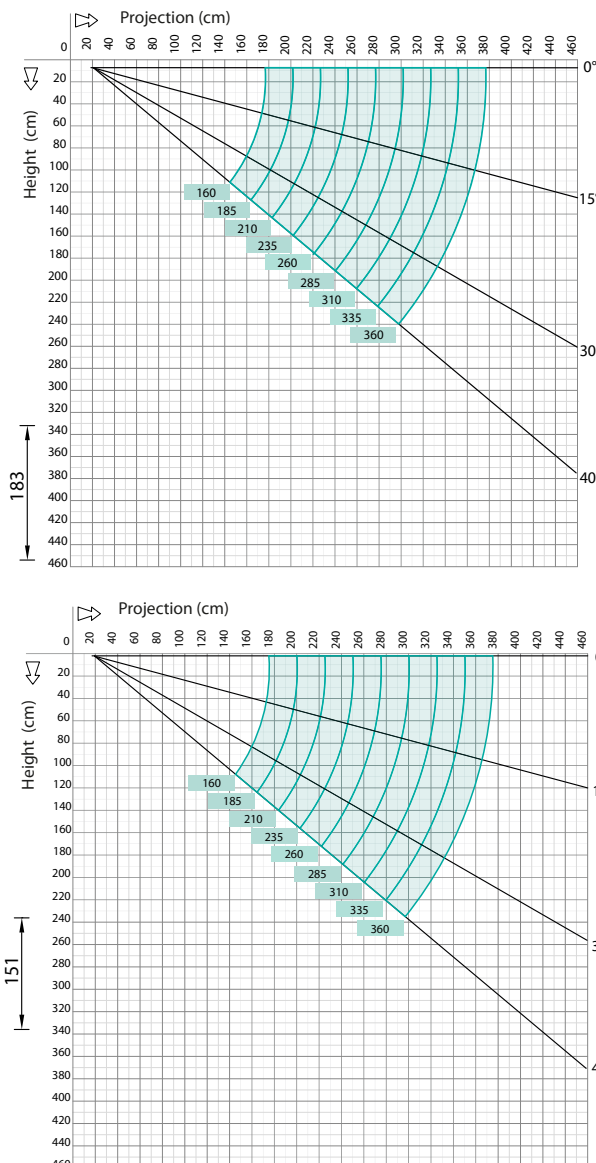

N.B. Fabric welded as standard